artos®



premier series shower set



OPERATING SPECIFICATIONS

FEATURES

Solid Brass 2-Outlets

INCLUDES F903B-59TK F703-6 F907-50

OPERATING PRESSURE Minimum: 15 psi Maximum: 75 psi Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE Maximum: 176°

FLOW CAPACITY Hand Shower: 2.0 USGPM Shower Head: 1.8 USGPM

F901-8 APPROVAL






artos®

PS139

premier series shower set

PRODUCT DIMENSIONS

for trim kit

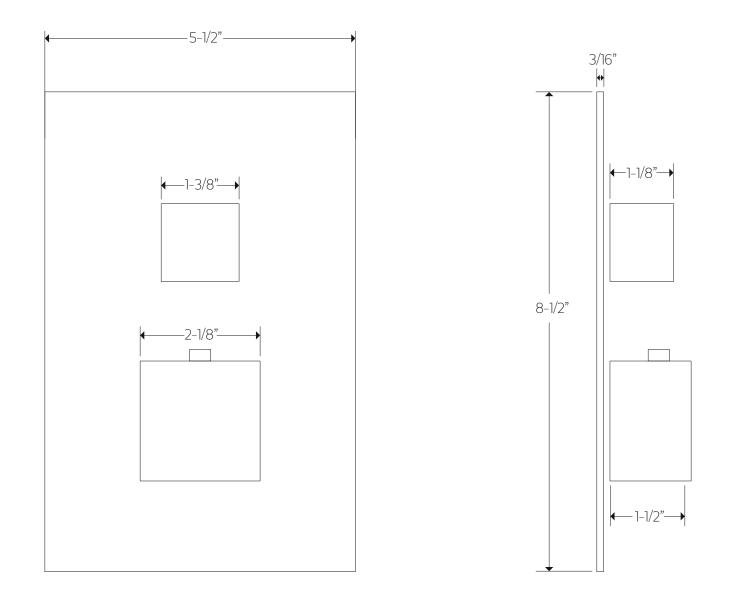



PRODUCT DIMENSIONS

for shower head

artos[®] PS139

premier series shower set

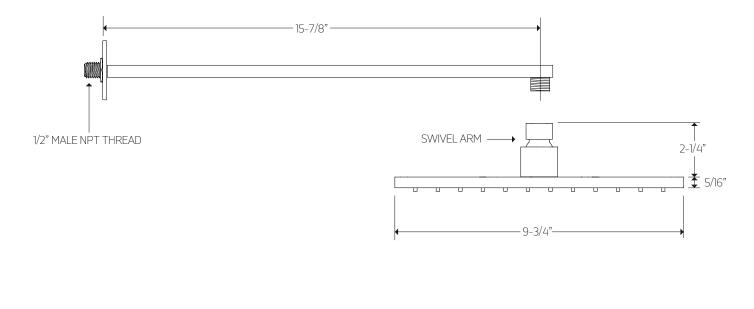



artos®

PS139

premier series shower set

PRODUCT DIMENSIONS

for hand shower

