

### **CODE NUMBER**

3913224

### **DESCRIPTION**

1.0 gpf, Rough Brass Finish, Single Flush, 10.75 L Dimension, Royal® Concealed Manual Urinal Flushometer.

### **DETAILS**

Flush Volume: 1.0 gpf (3.8 Lpf)Finish: Rough Brass (RB)

· Valve: Diaphragm

• Valve Body Material: Semi-red Brass

• Fixture Type: Urinal

• Fixture Connection: Top spud

• Rough-In Dimension: 13 ½" (343mm)

Spud Coupling: <sup>3</sup>/<sub>4</sub>" (19mm)
Supply Pipe: <sup>3</sup>/<sub>4</sub>" (19mm)

• L Dimension: 10 3/4" (273mm) (10-3/4-LDIM)

### **FEATURES**

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either

- Vacuum Breaker
- Spud Coupling for 3/4" Exposed Top Spud Urinals
- Elbow Flush Connection
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop



### **COMPLIANCES & CERTIFICATIONS**







(ADA Compliant, cUPC Certified, BAA Compliant)

### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

### **VALVE OPERATING PRESSURE (FLOWING)**

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## **DOWNLOADS**

- Sloan Concealed Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Additional Downloads

# NOTES

All information contained within this document subject to change without notice.


Looking for other variations of the ROYAL 197 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# **ROUGH-IN**

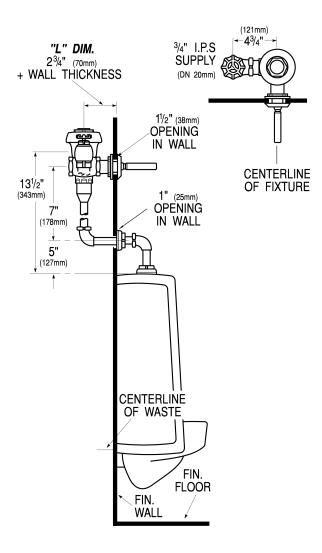

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com