

FEATURES

- Close coupled 2-pc. HET toilet. Combination round front bowl and tank, less seat.
- 12" (305mm) rough-in.
- Vitreous china.
- MaP™ Rated 1000 Gram Flush
- High efficiency (1.0 gpf/3.8 Lpf).
- Gravity feed, siphon action bowl.
- 2" fully-glazed trapway.
- Wide 3" flush valve.
- 15-1/6" rim height.
- Color-matched trip lever.
- 2 color-matched bolt caps.
- 5 Year Limited Residential Warranty / 1 Year Commercial Warranty
- Meets strict flushing performance criterion established by the EPA (environmental protection Agency) WaterSense program
- High efficiency toilets use at least 20% less water than standard 1.6 GPF toilets
- This product can help a building earn Water Efficiency points in the LEED Greep Building Rating System™

**1000
gram
MaP**



TOILETS/LAVS

COLORS


- White
- Biscuit

Specified Model

	MODEL NO.	DESCRIPTION	Length	Width	Height
COMPLETE TOILET KIT					
<input type="checkbox"/>	TBT-1560	RD Bowl & LH Tank	26 ¹ / ₇ "	18 ¹ / ₈ "	30 ³ / ₈ "
INDIVIDUAL COMPONENTS					
<input type="checkbox"/>	TB-1560	Round Front Bowl	26 ¹ / ₇ "	14 ¹ / ₈ "	15 ¹ / ₈ "
<input type="checkbox"/>	TT-1560	Toilet Tank - LH Trip Lever	8 ¹ / ₂ "	18 ¹ / ₈ "	15 ¹ / ₈ "

To Be Specified: Color (see below)

<input type="checkbox"/>	01 White
<input type="checkbox"/>	08 Biscuit

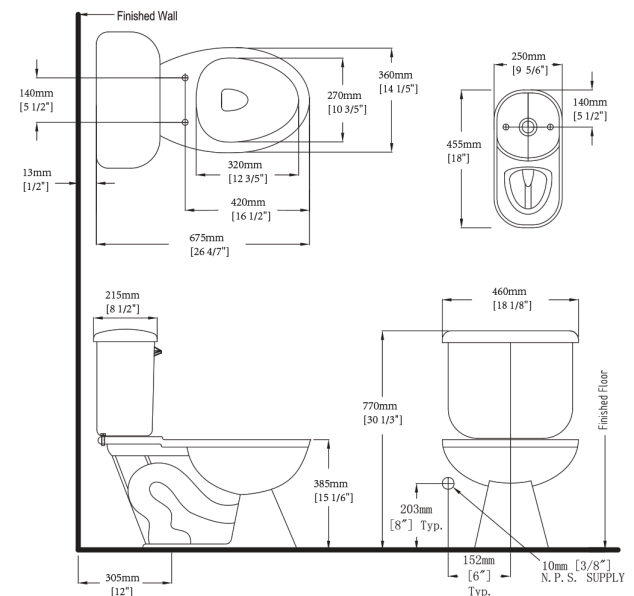

**Compliance Certifications -
Meets or Exceeds the Following Specifications**

- ASME A112.19.2M-2008/CSA B45.1-2008
- UPC®, National Plumbing Code of Canada, IPC & IRC
- EPA Water Sense Tank-Type High Efficient Toilet Specs

This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately.

Dimension shown for location of supply is suggested. For additional information refer to installation instructions supplied.